EAN1350

1.3 Megapixel CCD Day/Night Network Camera

EverFocus EAN1350 megapixel network camera provides dual-stream with MPEG4 and MJPEG compression. The EAN1350 is equipped with a low 0.2 lux and True Day/Night with auto IR cut filter for high quality day and night performance. Supported with PoE (Power over Ethernet), power and signal can be transmitted over the same cable to eliminate the need for local camera power.

EverFocus®

EAN1350

1.3 Megapixel CCD Day/Night Network Camera

COLOR NTSC, PAL | ES 1/50 (1/60) ~ 1/100,000 | AWB Yes | BLC Yes | Day/Night | AGC Yes | MPEG-4/ MJPEG | Smart Event Wizard | FTP/SMTP Client Support | Web Viewer | Two Way Audio | Motion Detection Support | POE

Specifications:

Camera	
Sensor	1/3" Progressive Scan CCD
Effective Pixel	Full Scan mode: 1280 x 960, 4-Pixel mode: 640x480
Electronic Shutter	1:50 ~ 1:10.000
Digital Slow Shutter	2x ~ 32x max. / off
AGC (Auto Gain Control)	3 steps
AWB (white balance)	automatic / manual / indoor / outdoor
IR Cut Filter	automatic / manual / ext. contact mode
Lens Mount	CS mount / C mount, DC drive, backfocus adjustment
Min. Illumination	1 lux / F = 1.2 colour mode 0,2 lux / F = 1.2 b/w mode
Analog Video Output	
Signal	PAL
Video Output	1 Vp-p composite, BNC (switchable between video out and IP streaming)
Network Streaming	
Video Compression	MPEG4 / JPEG (Dual Streaming)
Video Frame Rate	12,5 IPS max. (JPEG 1260 x 980) 25 IPS max. (MPEG4 640 x 480), adjustable
Compression Rate	5 steps
Video Resolution	MPEG4: 640 x 480, 352 x 288, 320 x 240, 176 x 144 MJPEG:1260 x 960, 640 x 480, 352 x 288, 320 x 240, 176 x 144
Pan/Tilt	digital and RS-485 PT device support
Motion Detection	yes (3 zones)
Video Streaming Protocols	RTSP/RTP/UDP, RTSP/RTP/TCP RTSP/RTP HTTP tunnel, LAN multicast
OSD	text, time and date, configurable
Audio	
Audio Input / Output	1 x line in, 1x line out, 3,5mm stereo sockets
Audio Modes	duplex / full duplex / simplex
Audio Codec	G.711, G.726 selectable
Communication	
LAN Port	RJ-45, 10/100 M auto-sensed, auto crossover
Communication Protocol	HTTP / RTSP / FTP / SMTP / TCP/IP / UDP / ARP / ICMP / DHCP / PPPoE / DDNS / UPnP / SAMBA
Video Streaming	RTSP/RTP/UDP, RTSP/RTP/TCP, RTSP/RTP HTTP tunnel, LAN multicast
I/O	
Alarm	2 inputs, 1 relay output, screwless terminal
RS-485I	1 x RS-485 telemetry output (Pelco D/P), screwless terminal
Status LED	G3x: status, network ling / traffic
Power Source	12 V DC / 24 V AC, 8 W max., or PoE 802.3af
Operating Temperature	0°C ~ +55°C / 32°F ~ 131°F
Storage Temperature	-20°C ~ +70°C / -4°F ~ 158°F
Humidity	10% ~ 95%, non-condensing
Dimensions	193.8 x 86 x 81 mm / 7.63" x 3.4" x 3.2" (L x W x H)
Weight	600g / 1.3 lbs

Features:

- 1.3 Megapixel Progressive Scan CCD sensor providing high definition video
- Progressive Scan technology for clear reproduction of fast moving objects
- Highest sensitivity day/night mode with auto IR cut filter removal technologies and CCD sensor
- With digital pan/tilt and electronic zoom, users can point and see the very details of the region of interest
- Dual codec (MPEG4 / MJPEG) simultaneously
- 2-way audio
- C/CS mount DC lens exchangeable with backfocus adjustment
- Power over Ethernet (PoE) eases installation, security and maintenance

Order Information:

- EAN1350: 1.3 Megapixel CCD Day/Night Network Camera

***Models vary in different countries. Please visit EverFocus regional websites for detailed ordering information.**

Dimnsions:

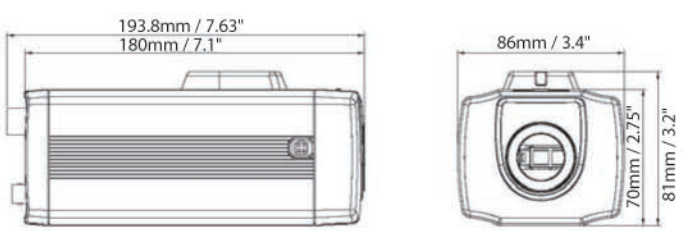

(Unit: mm/inch)

*Visit www.everfocus.com for complete product line

Notice:

© 2005~2008 EverFocus Electronics Corp. EverFocus is a registered trademark of EverFocus Electronics Corp. All rights reserved.
Product features and specifications are subject to change without notice. No parts or contents of this datasheet may be reproduced or transmitted in any form or by any means without permission from EverFocus.
* Not all models featured are available in all countries. For accessories and other product information, please visit www.everfocus.com
* Safety Precaution: Please read all operating instructions and installation manual carefully before using this product.
* EverFocus is not responsible for network performance and/or other manufacturer products that reside on the network
* All product weights and dimensions are approximate.
* All products may be subject to export control regulations
* All product photographs were taken for the purpose of explanation. Actual images may differ.
* This datasheet is designed and printed in Taiwan.

EverFocus®

MKE-20090730